




12,000 Lumen Dual Head LED

Tripod Work Light

User Manual

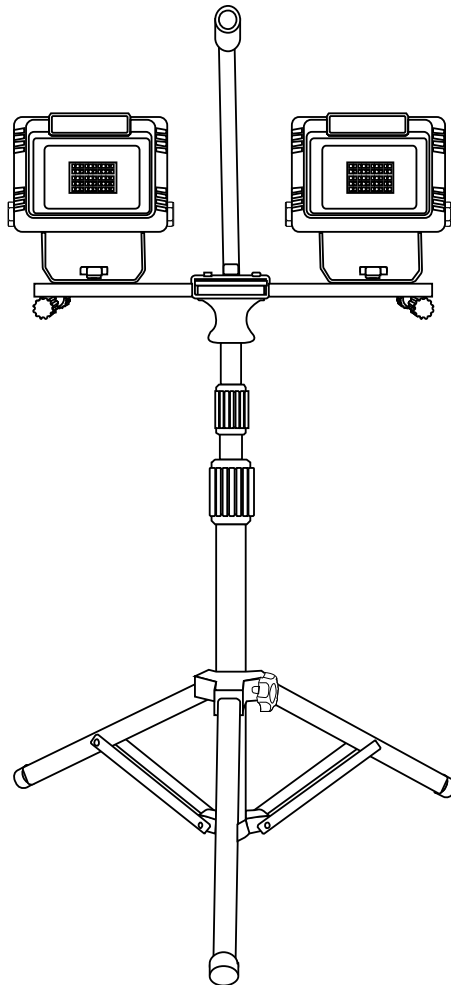

! WARNING: Read carefully and understand all ASSEMBLY AND OPERATION INSTRUCTIONS before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

Items 9014796
Rated:120V-60Hz 12,000LM

IMPORTANT SAFETY INFORMATION

READ ALL INSTRUCTIONS

1. All Safety and Operating instructions in this manual must be followed before using this product.
2. Follow all safe guards stated in the manual, in addition to normal safety precautions in working with electrical devices. Always follow basic safety precautions to reduce the risk of fire, electric shock and personal injury.
3. Ground Fault Circuit Interrupter (GFCI) protection is to be provided on the circuit (s) or for the wet location portable luminaire. Receptacles are available having built-in GFCI protection and are able to be used for this measure of safety.
4. Use only with an extension cord for outdoor use, such as an extension cord of cord type SEW, SE0W, SE00W, S0W, S00W, STW, ST0W, ST00W, SJEW, SJE0W SJE00W, SJW, SJ0W, SJ00W, SJTW, SJT0W or SJT00W.
5. To disconnect, turn off the switch, then remove the plug from the outlet. Do not turn off by pulling on the cord.
6. To reduce the risk of fire, keep away from combustible materials while in operation.
7. To reduce the risk of injury, close supervision is necessary when this product is used near children.
8. Suitable for Wet Locations



WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.



WARNING: When using outdoor use portable luminaires, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury.



WARNING: Use only three-wire extension cords that have three-prong grounding plugs and grounding receptacles that accept the appliance's plug. Do not use an extension cord near water or in areas where water may accumulate. Keep away from pools or spas. Keep plugs dry.



CAUTION: This portable light-emitting diode (LED) luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug Will fit in a polarized outlet only one way. If the plug does not fully fit in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Do not alter the plug.

MAINTENANCE AND CARE

Maintenance of this work light is very minimal Regularly clean the lens with a non-abrasive cleaning cloth. The same care should be provided for the stand.

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference , and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.


Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the users authority to operate the equipment.

Grounded Lights: Lights with Three-Prong Plugs

1. Lights marked with "Grounding Required" have a three wire cord and a three prong grounding plug. The plug must be connected to a properly grounded outlet. If the Light should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. **(See 3-Prong Plug and Outlet.)**

2. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the Light. The green wire in the cord must be the only wire connected to the Light's grounding system and must never be attached to an electrically "live" terminal. **(See 3-Prong Plug and Outlet.)**

3. The Light must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances. The plug and outlet should look like those in the preceding illustration. **(See 3-Prong Plug and Outlet.)**

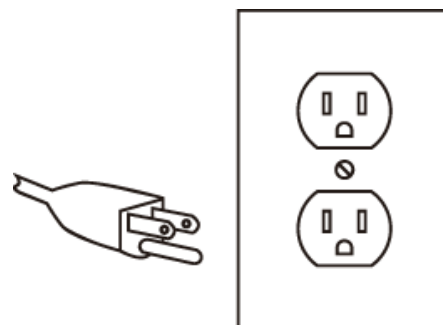

3-Prong Plug and Outlet

Symbology

	Double Insulated		Read the manual before set-up and/or use.
VAC	Volts Alternating Current		WARNING marking concerning Risk of Fire. Do not cover ventilation ducts. Keep flammable objects away.
A	Amperes		WARNING marking concerning Risk of Electric Shock. Properly connect power cord to appropriate outlet.
n0 xxxx/min.	No Load Revolutions per Minute (RPM)		
	WARNING marking concerning Risk of Eye Injury. Wear ANSI-approved safety goggles with side shields.		


PRE-ASSEMBLY

PARTS INCLUDED




NOTE: Parts not shown to actual size.


Part	Description	Quantity
AA	LED Work Light Body	2
BB	Tripod	1
CC	Lamp Mounting Bar	1
DD	Locking Knobs	2
EE	Locking Washers	2
FF	Washers	4
GG	Carrying Handle	1
HH	Hex Key Allen Wrench	1
II	Handle Locking Knob	1
JJ	Hex Screws	2
KK	Triangular Locking Knobs	2

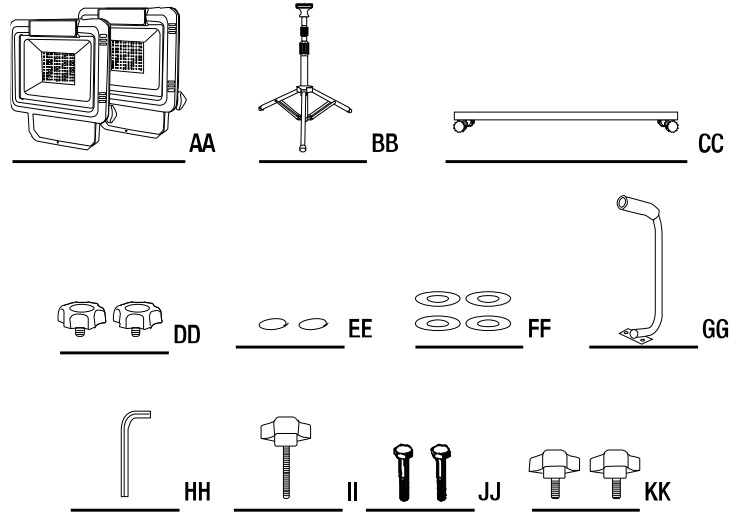

PARTS OF THE DUAL HEAD WORK LIGHT

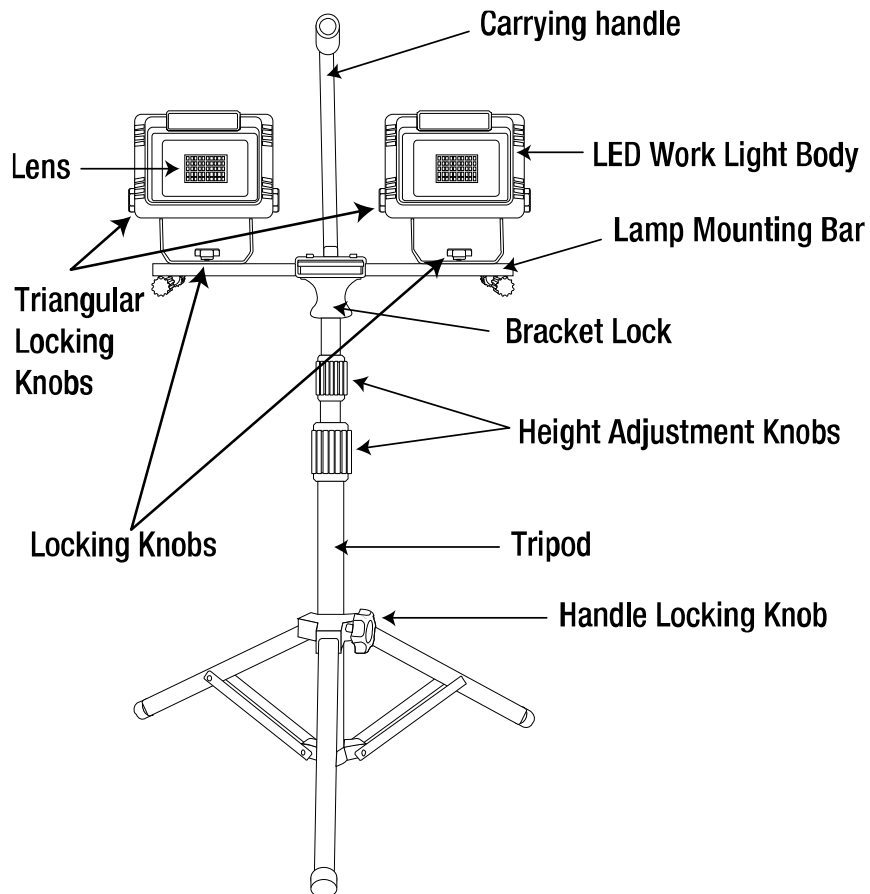


Back of the Work Light

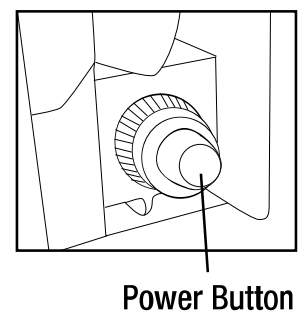


Assembly


1. Loosen the Handle Locking Knob (II) and move the three legs out and down, then tighten the Handle Locking Knob (II) (See Fig. 1).

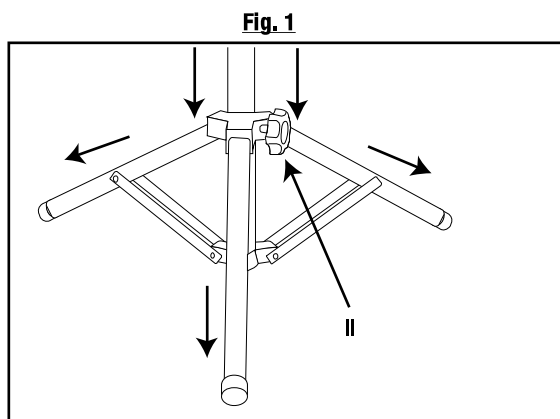


2. Use the included Hex Wrench (HH) to remove the Hex Screws (JJ) from the Lamp Mounting Bar (CC). Place the Carrying Handle (GG) on the Lamp Mounting Bar (CC) and align it with the screw hole. Place the Hex Screws (JJ) back and tighten them to hold the handle in place (see Fig. 2).

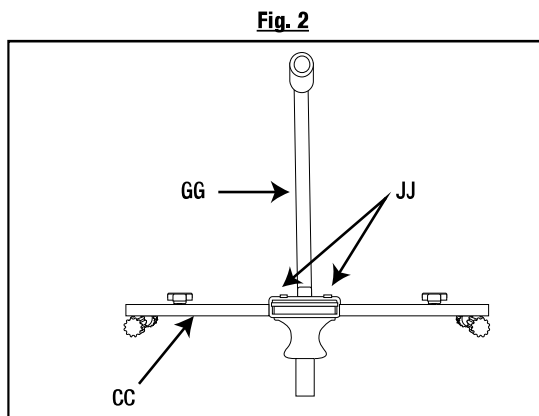

3. Place the Lamp Mounting Bar (CC) onto the Tripod (BB) and secure it into place with the bracket lock (see Fig. 3).

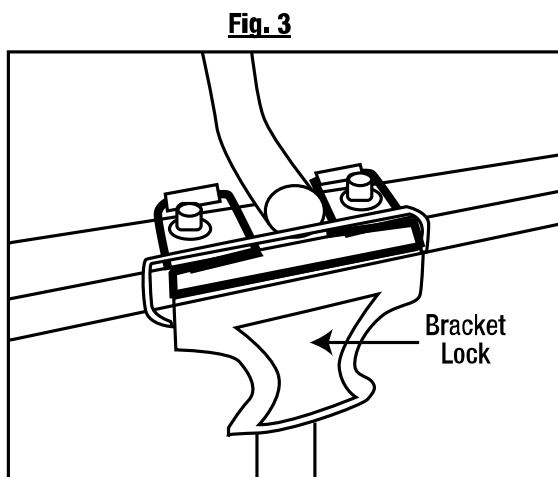


4. Attach the LED Work light Body (AA) to the Stand (BB) by first inserting the Locking Washer (DD) and Washer (EE) onto the Locking Knob (CC) and screwing the Locking Knob (CC) through (AA) and into the stand (BB) (see Fig. 4). Tighten the Locking Knob (CC) to set into place.

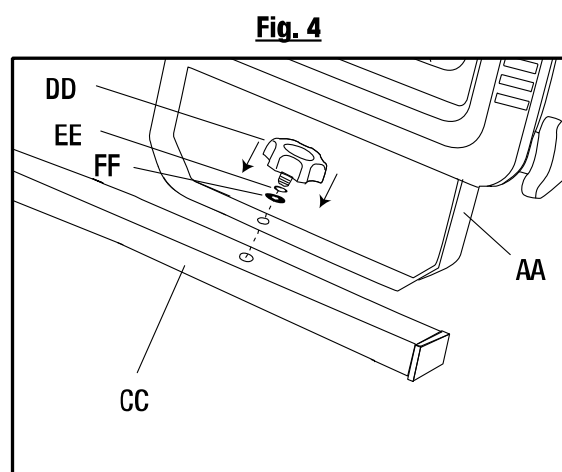

NOTE: The Locking Knobs (DD) must be loosened first when placing the LED Work Light Body (AA) on the Lamp Mounting Bar (CC). Re-tighten the same Locking Knob (DD) to hold it into position and repeat for the other side of the led Work Light Body (AA).


5. Rotate the height adjustment knobs counter-clockwise to loosen them and pull up the tripod to the desired height. Rotate the height adjustment clockwise to secure the tripod in place.

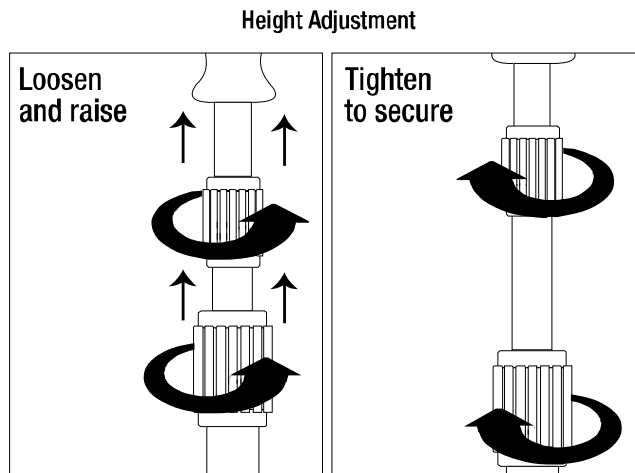

6. Switching to Locking Knobs

Remove the preinstalled hex screws (JJ) using the included hex key allen wrench (HH). Insert the new Triangular Locking Knobs (KK) with the same Washers (FF) and tighten in a clockwise direction (see Fig. 5).


Fig. 5

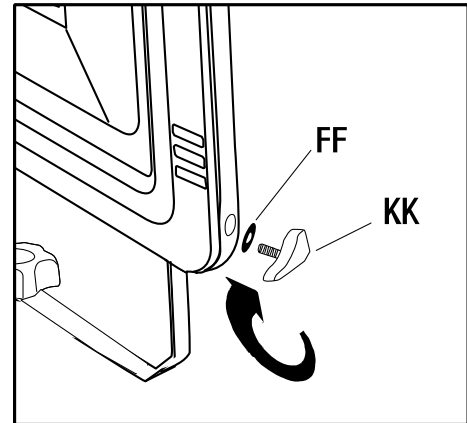

7. Once the LED Work Light Body (AA) has been attached to the Tripod (BB), the LED Work Light can pivot vertically and horizontally into the desired position.

Horizontal Pivoting

To pivot horizontally the center Locking Knobs then adjust to your preferred position. Once set to your desired position, re-tighten the center Locking Knob to lock it into place.

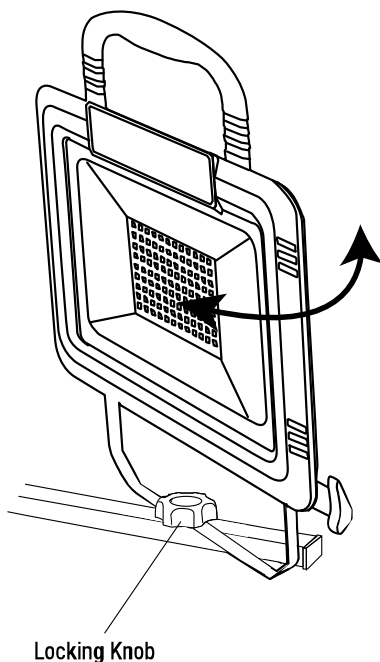

Vertical Pivoting

To pivot vertically loosen the two Triangular Locking Knobs found on each side and adjust to your preferred position. Once set to your desired position re-tighten both Triangular Locking Knobs to lock it into place.

