

# **RENEGADE**

## **USER MANUAL**



MODEL:

**6TREN102SBH**

**HEAVY DUTY ROLLING  
TIRE RACK**

## IMPORTANT

PLEASE NOTE: WHEN YOU OPEN THE CARTON CAREFULLY CHECK THE UNIT AND MAKE SURE THERE IS NO DAMAGE. IF YOU HAVE ANY PROBLEMS WITH THE UNIT, WITH HOW THE VARIOUS FUNCTIONS WORK, OR DAMAGED OR MISSING PARTS, PLEASE CALL 1-800-459-4409 (MONDAY TO FRIDAY, 8 AM TO 5 PM, CST) IMMEDIATELY FOR SERVICE.

NOTE: DO NOT RETURN UNIT TO THE STORE BEFORE CALLING THE TOLL FREE NUMBER. DO NOT DISPOSE OF YOUR CARTON UNTIL YOU ARE COMPLETELY SATISFIED WITH YOUR NEW TIRE RACK.

## TABLE OF CONTENTS

|                                     |   |
|-------------------------------------|---|
| IMPORTANT SAFETY INSTRUCTIONS ..... | 2 |
| PARTS LIST .....                    | 3 |
| ASSEMBLY INSTRUCTIONS .....         | 4 |
| ONE YEAR LIMITED WARRANTY .....     | 5 |

## IMPORTANT SAFETY INSTRUCTIONS

FAILURE TO READ AND FOLLOW ALL INSTRUCTIONS IN THIS MANUAL MAY RESULT IN INJURIES OR DEATH. SAVE THESE INSTRUCTIONS FOR FUTURE USE.

ALWAYS WEAR EYE PROTECTION WHEN INSTALLING PARTS.

TIRE RACK COMPONENTS ARE MADE OF METAL, SO BEWARE OF ANY SHARP EDGES. DO NOT LET ANY COMPONENTS MAKE CONTACT WITH A ELECTRICAL CURRENT DURING INSTALLATION.

KEEP THE TIRE RACK ON A FLAT, LEVEL FLOOR.

THE TIRE RACK MUST NOT BE USED FOR ANY OTHER PURPOSES THEN STORING TIRES.


KEEP CHILDREN AWAY FROM THE TIRE RACK.

THE MAXIMUM TOTAL WEIGHT CAPACITY OF THE TIRE RACK IS 725 KG (1,600 LB).

VERIFY ALL CONNECTIONS AT LEAST ONCE PER YEAR IN ORDER TO ENSURE THAT THEY ARE FASTENED SECURELY. REGULARLY CHECK FOR DAMAGE AND DISCONTINUE USE OF THE TIRE RACK IF DAMAGE IS NOTED.

# PARTS LIST

UNPACK ALL PARTS AND MAKE SURE ALL PIECES ARE PRESENT BEFORE CONTINUING WITH ASSEMBLY.

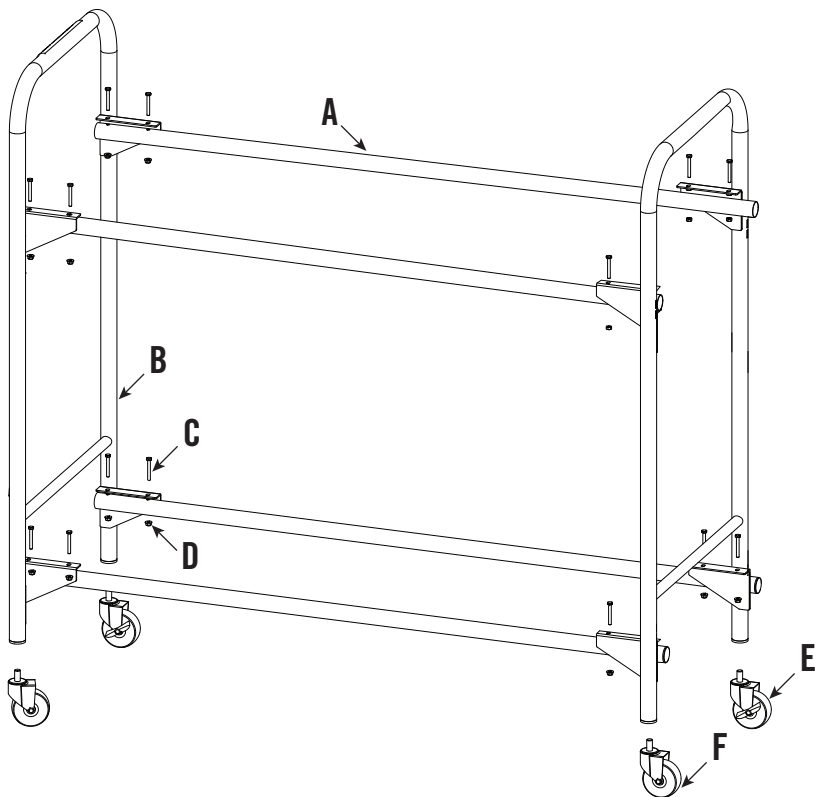


| Reference | Part Name           | Quantity |
|-----------|---------------------|----------|
| A         | Crossbar            | 4        |
| B         | Upright             | 2        |
| C         | 1/4-20 x 2 Hex Bolt | 16       |
| D         | 1/4-20 x 2 Hex Nut  | 16       |
| E         | Locking Caster      | 2        |
| F         | Non-Locking Caster  | 2        |

IF YOU HAVE ANY MISSING OR DAMAGED PARTS, PLEASE CONTACT:  
1-800-459-4409 (Monday to Friday, 8 am to 5 pm, CST) or [www.qualitycraft.com](http://www.qualitycraft.com)

## ASSEMBLY INSTRUCTIONS


1. Attach two crossbars [A] to the bottom brackets of the uprights [B] using the hex bolts [C] and hex nuts [D]. See Fig. 1.

NOTE: The crossbar brackets should face inward.

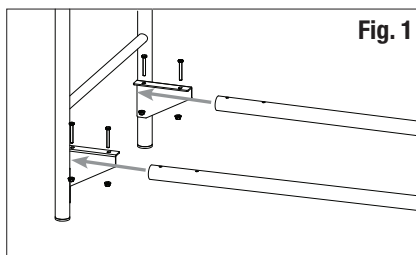


**Fig. 1**

2. Attach two crossbars [A] to the top brackets of the uprights [B] using the hex bolts [C] and hex nuts [D]. See Fig. 2.

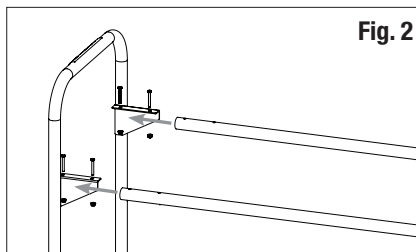

**Fig. 2**

3. Thread the casters [F and G] into the bottom of the uprights [B]. Place the locking casters on opposite sides of the rack. See Fig. 3.

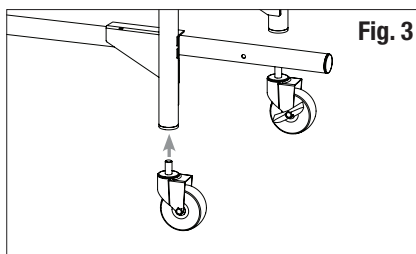

**Fig. 3**

## ONE YEAR LIMITED WARRANTY

This product is warranted to be free from defect in materials and workmanship under residential use for a period of one year from date of purchase. Proof of purchase is required for all claims. The company's sole obligation is to repair or replace the unit. This warranty is void if the unit has been incorrectly assembled, altered, taken apart, misused or abused.

### WARRANTY CLAIM PROCEDURE

Please make sure you have:

1. The description of the tire rack
2. Proof of sale
3. Details regarding the defect
4. Name and address of the owner and installer

Claims must be filled out in writing and returned within six (6) months of appearance of defect. Failure to comply with this stipulation will make the warranty null and void. We reserve the right to a thirty-day (30) delay following receipt of claim in which to inspect the product. We assume no responsibility for labor costs or removing/replacing a previously installed product or transportation or return of a product.

Imported by  
**Quality Craft**  
Surrey, BC, Canada V3S 5N4  
1-800-459-4409  
[www.qualitycraft.com](http://www.qualitycraft.com)

Made in China

09/16