

Spring-Loaded Adjustability for any Terrain

Heavy duty spring-loaded gate casters adjust with surrounding terrain to maintain gate height and assist with easy opening and closing. The rotating supports work equally well on level and uneven exterior surfaces such as asphalt, brick, concrete, dirt, grass, gravel and pavers with spring-loaded vertical travel to smoothly navigate the terrain surrounding the gate.


For use on wood, metal or chain link gates



shepherd
HARDWARE PRODUCTS



**IDEAL FOR
GRAVEL,
GRASS, OR
PAVERS**

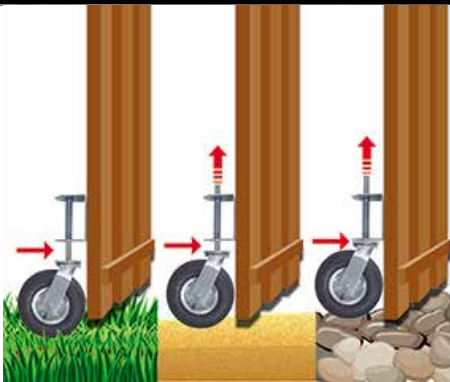


Gate & Door Casters

									
SKU	UPC (0 39003)	CASTER TYPE	WHEEL DIAMETER	WHEEL COLOR	WHEEL COMPOSITION	MOUNTING METHOD	BRACKET SIZE H" x L" x W"	LOAD CAPACITY	CARTON QUANTITY
8734	08734 3	Swivel	8"	Black	Flat-Free	Universal Bracket with Hardware	5-1/2" x 4" x 3-3/4"	220	4

Model 8734

FLAT-FREE

Flat-Free tires are weather-resistant, never require maintenance and withstand punctures from objects that typically cause flats

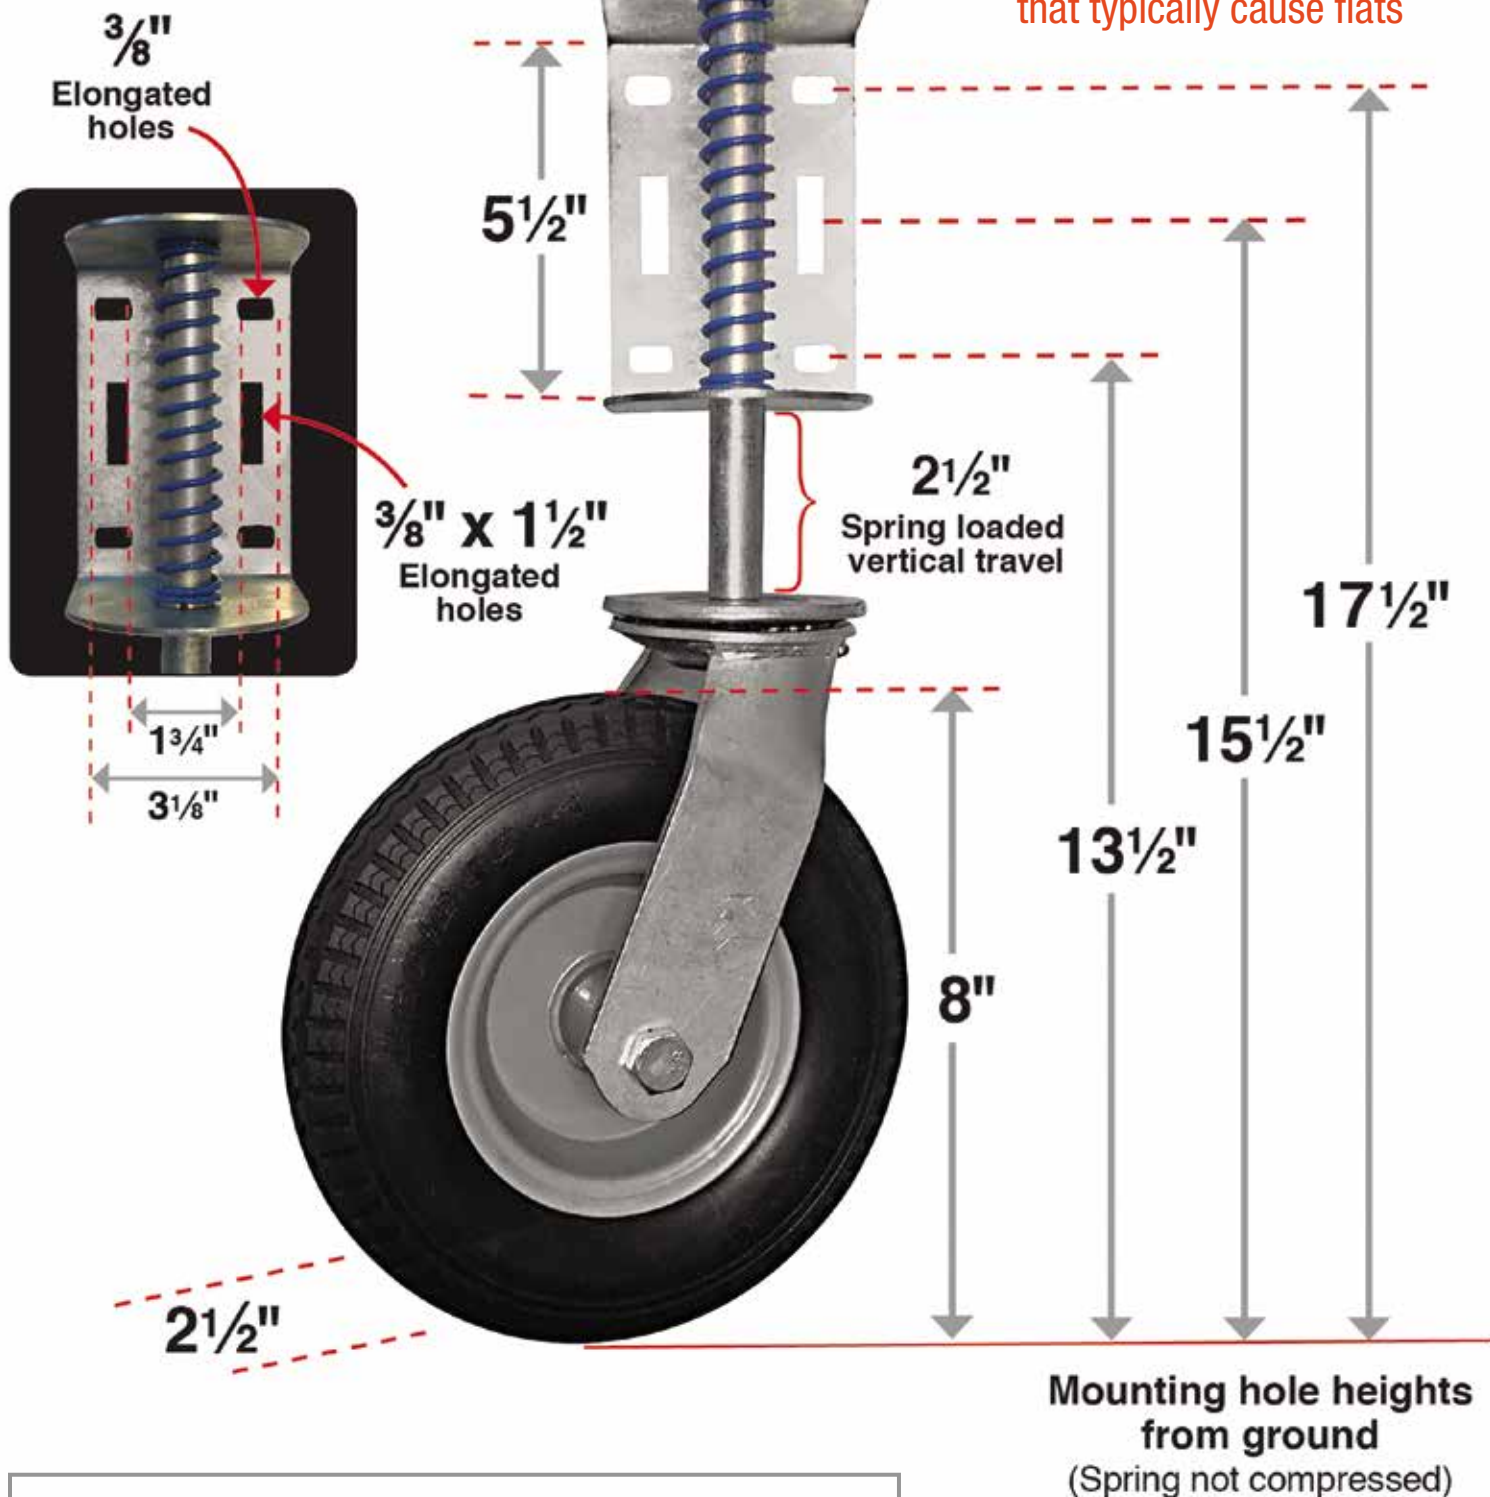

Hardware included
for attachment to
tubular gates up
to 2" diameter

Ressort s'ajustant à tous types de terrains


Les roulettes de portail à ressort robustes s'adaptent au terrain environnant pour faciliter l'ouverture et la fermeture ainsi que maintenir la hauteur du portail. Ces supports rotatifs fonctionnent aussi bien sur des surfaces extérieures planes et inégales que l'asphalte, la brique, le béton, la terre, l'herbe, le gravier et les pavés, compte tenu du mouvement vertical à ressort pour naviguer en douceur sur la surface environnante.

*Convient sur des portails
de bois, de métal ou à
mailles de chaîne*



shepherd
HARDWARE PRODUCTS

**IDÉAL POUR
LE GRAVIER,
L'HERBE OU
LES PAVÉS**

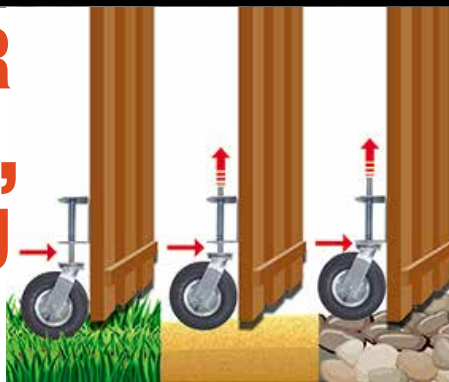

Roulettes de portail et porte




ITEM N°	CODE UPC (0 39003)	TYPE DE ROULETTE	DIAMÈTRE	COULEUR	COMPOSITION DE LA ROUE	MÉTHODE DE MONTAGE	TAILLE DE LA FIXATION H" x L" x L"	CAPACITÉ DE CHARGE	QUANTITÉ EN CARTON
8734	08734 3	Pivot	8"	Noir	Anti-crevaisson	Support universel avec quincaillerie	5-1/2" x 4" x 3-3/4"	220	4

Modèle 8734

ANTI-CREVAISON

Roue anti-crevaison, résistante aux intempéries qui ne nécessite jamais d'entretien et qui résiste aux perforations d'objets à l'origine de crevaisons

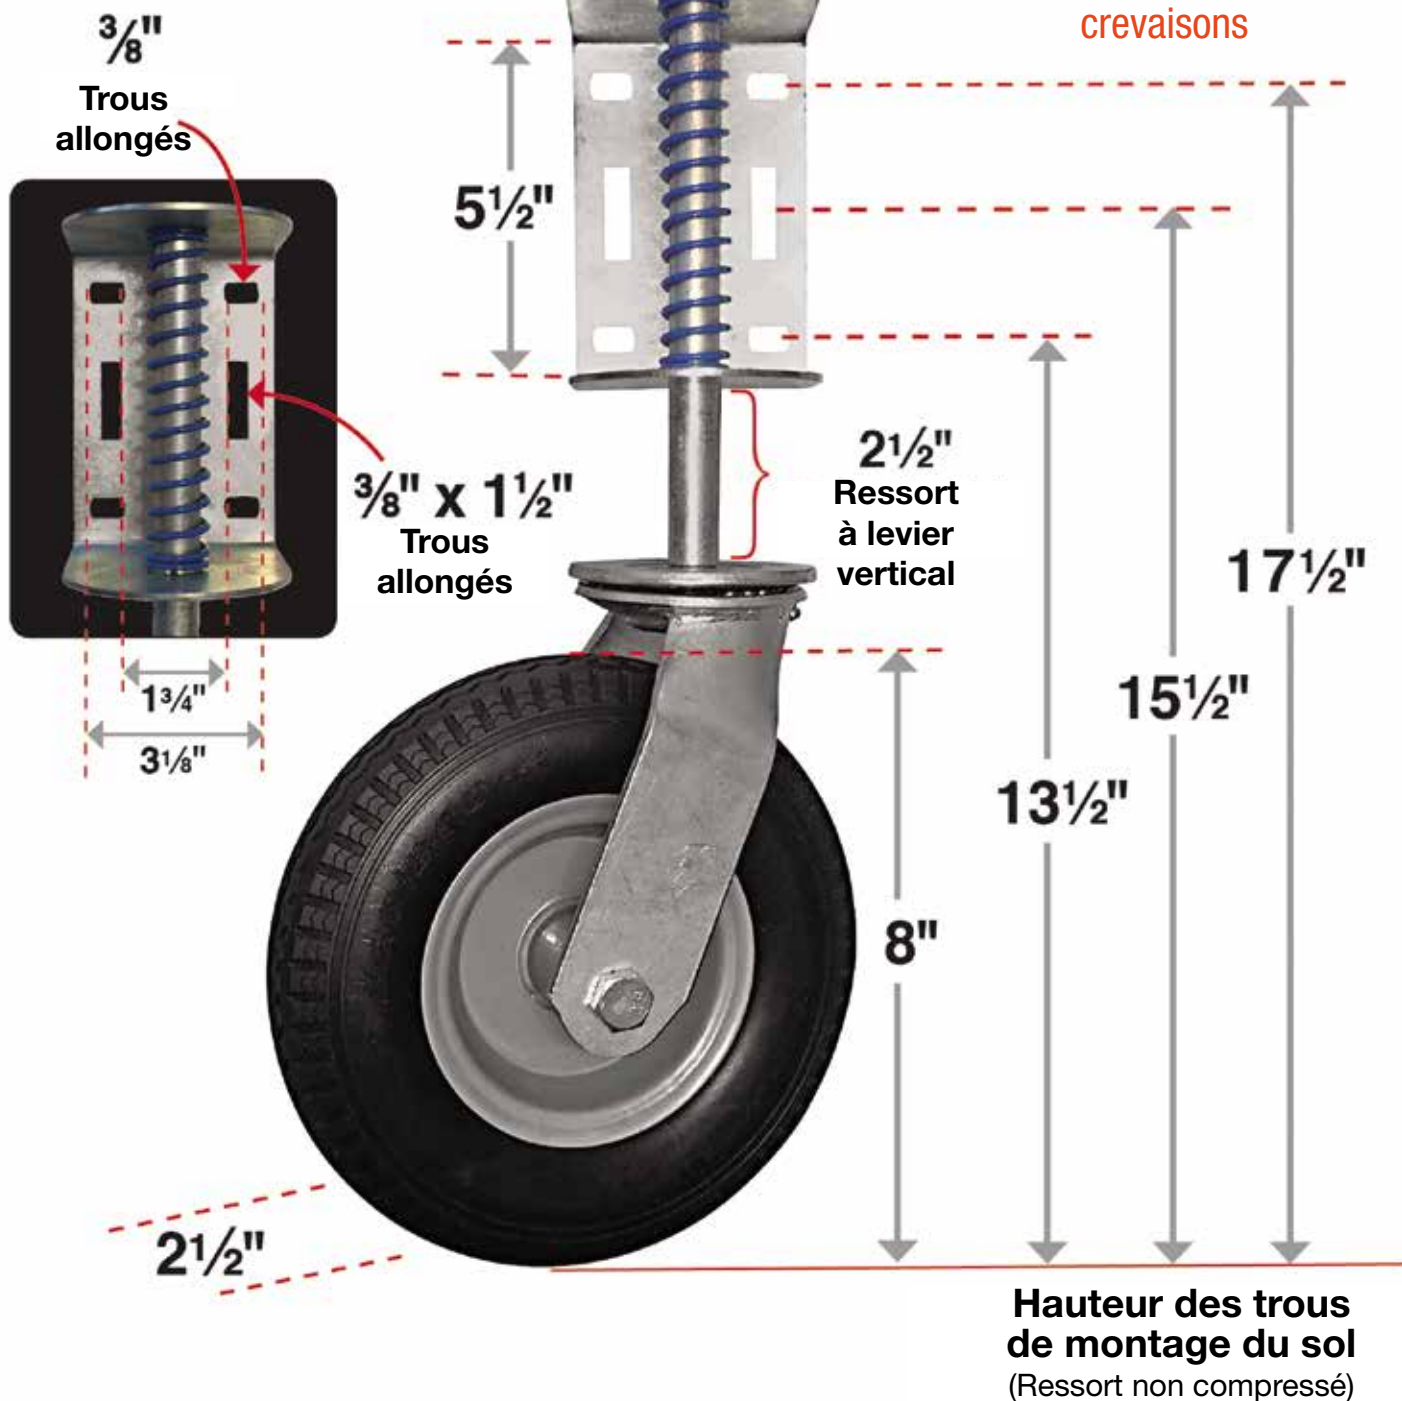

Quincaillerie incluse pour fixation sur portail tubulaire d'un maximum de 2 po de diamètre